

Project:



**Scan for more info!**

Owners manual  
Quick install  
Quick sizing  
Install layout  
Parts list

## CP2000-SW-BH

Low volume chilled still water only  
Undercounter mount



### Low volume chilled still water on tap



- Perfect for office, hotel suites, wineries & residential
- Water dispensing temperatures average between 34-40°
- Remote application with built in cold water re-circ for installation up to 6' in distance
- Bulkhead fittings for easy hookup to faucet. Extra fittings and water regulator supplied with unit.

### Specifications

- 50, 12oz drinks per hour @ <40°
- Self-contained refrigeration system
- Operating temperature range: 40°-100°
- Electrical: 120v - 2.8 Amps
- Water bath: 2.5 Gallons
- Ice bank: 6 lbs
- Weight: 75 lbs
- 11.75"W x 17.5"D x 16.5"H
- \* Stainless steel water coils
- \* Reverse osmosis compatible

\* For CP2000-SW-BH using reverse osmosis water, add -RO to the end of the model number and call for pricing.

\* All other CP2000 chillers are compatible with reverse osmosis water as is

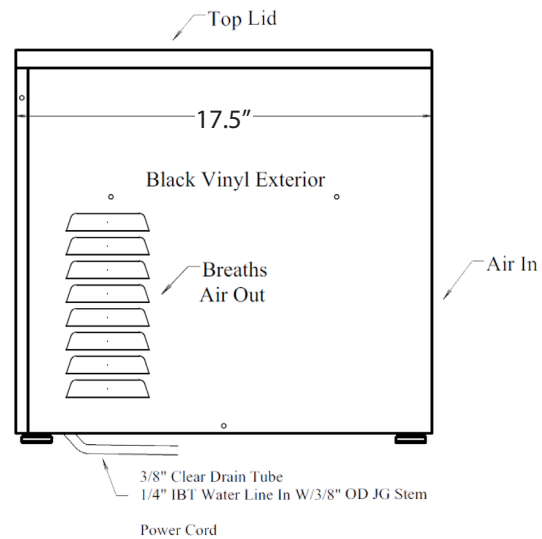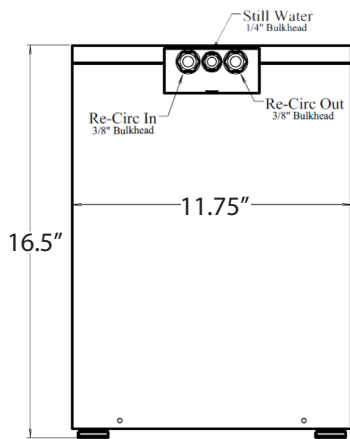

- Allow for 6" rear & side clearance for air flow
- Shipping weight: 75lbs
- 3/8" water connection

- 9' electrical cord NEMA 5-15 plug
- Electrical: 120v
- 7' overflow drain hose, clear

## Accessories:

- CR-14FCP with Prefilter
  - CR-14FC without Prefilter
- Filtration systems feature one 4FC Fibredyne technology, quick change, sanitary cartridge. T.O.C. capacity 15,000 gal at 2.5 GPM.



- CBR-V1C
  - CBR-V1WHT
- Single valve, single product  
One SSQ adjustable flow faucet



- CR-KIT-CPUC
- Kit includes fittings needed to complete the installation of CR-14FC filter system to Remote Chiller CP2000-R-UC-BH and CP2000-SW-BH tower or faucet. Includes: fittings, re-circ tubing, and extra tubing. CP2000 UC Series Only



- CR-LBS10JG
- In-line leak detector with auto shut-off. For use with any Crysalli chiller system



ETL Sanitation Listed

Intertek

