

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-2PB-3V Countertop




Sparkling, chilled still and still water on tap

- Cold carbonation for better long lasting sparkling water
- Push button dispensing; ideal for self-service use
- European design, mirrored finish stainless steel exterior
- Made in USA

Specifications

- 80 liters per hour @ 40°
- Self-contained refrigeration system
- Compressor: 1/3 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,600 per hour average
- Operating temperature range: 40° - 100°
- Electrical: 120v - 15 Amps
- Carbonator: 1/3 H.P.
- Water bath: 6 Gallons
- Ice bank: 25 lbs
- Weight: 165 lbs
- Clearance: 12"
- 20"W x 28"D x 24.75"H

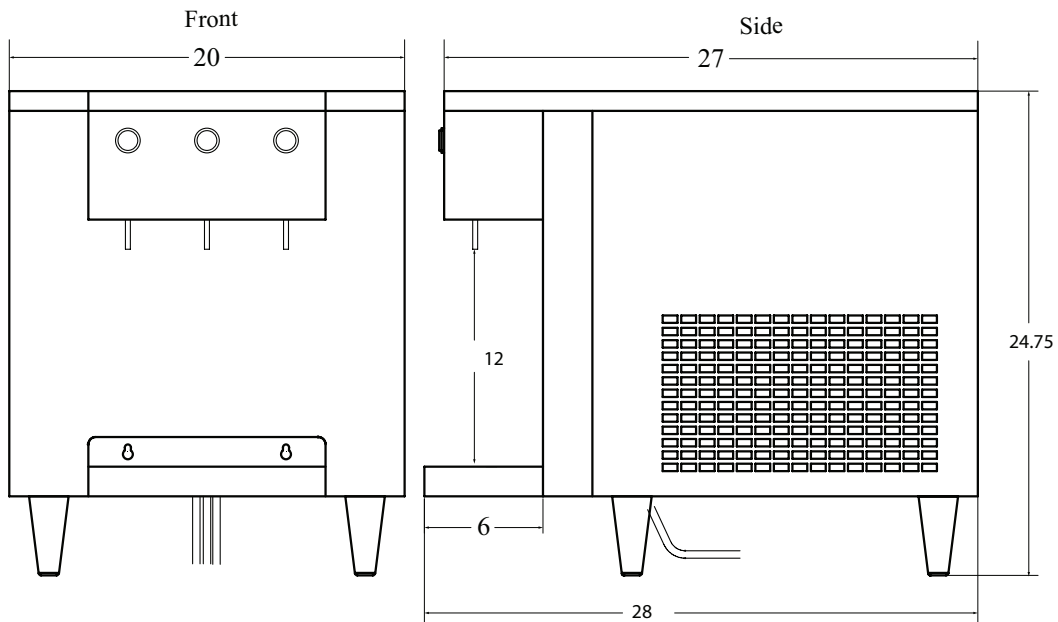

- 3/8" Water inlet connector
- 7' Over flow drain hose, 3/8" ID
- 7' CO2 hose 1/4" flare fitting
- 9' Electrical cord NEMA 5-15
- 4.25" legs
- Air intake at rear with air filter
- Allow for 6" clearance on each side for air flow
- Allow for a minimum of 3" of rear clearance for air intake and plumbing connections

Accessories:

- **CR-3741**
Primary high pressure CO2 regulator for CO2 tank



- **CR-KIT-CT**
Installation kit for countertop units, CR-1 & CR-2, Includes: LBS-10JG leak block sensor, fittings and oetiker clamps and extra tubing to install the filter systems and countertop unit



- **CR-24FCP with prefilter**
- **CR-24FC without prefilter**
Twin filter system with compact fibre-dyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- Customer supplied CO2 tank required

