



PRODUCT SPECIFICATIONS





Capacity

Electric Frequency		60 Hz			50 Hz	
Dispenser Type	Air-Cooled	Remote	Water-Cooled	Air-Cooled	Remote	Water-Cooled
Barrel Volume	184 oz	N/A	N/A	N/A	N/A	N/A
Continuous Draw - Single Barrel [§]	3,600 oz/hr	N/A	N/A	N/A	N/A	N/A
Continuous Draw - Alternating Barrels [§]	N/A	N/A	N/A	N/A	N/A	N/A
Recovery Time [§]	4 mins	N/A	N/A	N/A	N/A	N/A
Refrigeration	15,000 BTU/hr (15,826 kJ/hr), R-404A			N/A		


[§] Testing completed at 75°F (24°C).

Electrical Requirements

Electric Frequency	60 Hz	50 Hz		
Voltage	215 - 245 VAC [△] , Single Phase	N/A		
Current	20 Amps	N/A		
Receptacle	NEMA #L6-20R, 3 Wire	N/A		
Beater Motor	(1) 1/6 HP, 0.85 A	N/A		
Fan Motor	(1) 1/4 HP, 0.83 A	N/A		

 $^\Delta$ Buck-boost transformer required for operation outside this range.

ROHS Compliant. FBD strives for continuous improvements and engineering innovations. Equipment design and/or specifications may change without notice. ©2019, FBD Partnership, L.P. FBD®, the FBD logo, and "Everyone Loves Frozen™" are trademarks of FBD Partnership, L.P., all rights reserved.

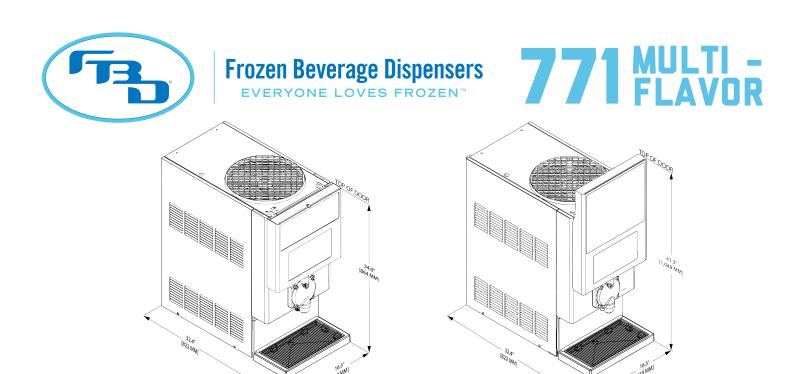

Weights & Dimensions

Measuring System	Imperial			Metric				
Door Model	Short Doc	or Tall Door		Tall Door	Short Do	Door		Tall Door
Height	34.0 in			41.3 in	864 mm	ו	1,049 mm	
Width	17.0 in			432 mm				
Depth	32.5 in			826 mm				
Back/Side Clearance (Min.)	3 in			76 mm				
Top Clearance (Min.)	12 - 36 in*			304 - 914 mm*				
Duratrans	6 ¹ / ₂ in x 15 ³	$^{3}/_{4}$ in 14 $^{1}/_{8}$ in x 15 $^{3}/_{4}$		′ ₈ in x 15 ³/ ₄ in	165 mm x 40	0 mm 359 r		mm x 400 mm
Screen Size	13.3 in Touch Screen			338 mm Touch Screen				
Dispenser Type	Air-Cooled	Ren	note	Water-Cooled	Air-Cooled	Ren	note	Water-Cooled
Empty Weight	288 lbs	N/A		N/A	131 kg	N/A		N/A
Operating Weight	311 lbs	N,	/A	N/A	141 kg	N	/A	N/A

23

 * 12 in (304 mm) with side or back open-air conditions, 36 in (914 mm) in equipment alcove.

S.S

Water, CO₂ and Syrup Requirements

Measuring System	Imperial	Metric			
Water System Input	3/8" Supply Line, 30 PSIG Flowing (minimum)	3/8" Supply Line, 207 kPag Flowing (minimum)			
CO ₂ System Input	70 - 72 PSIG (maximum)	483 - 496 kPag (maximum)			
Condenser Water Inlet Flow Rate⁰	N/A	N/A			
Condenser Water Inlet Temperature⁰	N/A	N/A			
Commune	Input: 70 - 72 PSIG (483 - 496 kPag)				
Syrup	Bag-In-Box (BIB) Connections, (1) Base Syrup and (4) Flavor Injections Syrups				

^o For water-cooled dispensers.

FBD Partnership, LP | 866.323.2777 | sales@fbdfrozen.com | fbdfrozen.com