

In this Issue:

Carb Pump By-Pass Adjustment.....2

Technical Bulletin Distribution:


The Lancer Engineering Department publishes a Technical Bulletin every other month. To subscribe or unsubscribe from the Tech Bulletin, go to lancerworldwide.com. Lancer Installation and Service Manuals, Instruction Sheets, previous Technical Bulletins, and a complete index of Technical Bulletin articles are also available at lancerworldwide.com. For general questions about the Tech Bulletin, email custserv@lancerworldwide.com or call (888) 846-6729.

Contact Information:


Lancer Sales: (800) 729-1500
Lancer Customer Service: (800) 729-1500
Lancer Warranty: (800) 729-1550
Lancer USA: (210) 310-7000
Canada: (210) 310-7187
Latin America: (210) 310-7000
International Sales: (210) 310-7063
Europe: 32-2-755-2390
Australia/New Zealand: 61-8-8268-1388
Email: custserv@lancerworldwide.com
Lancer Website: www.lancerworldwide.com

Manually Reduce The By-Pass Pressure On Carb Pump Head

1. Use Phillips-screwdriver to loosen deck screws to remove or shift lock bracket.

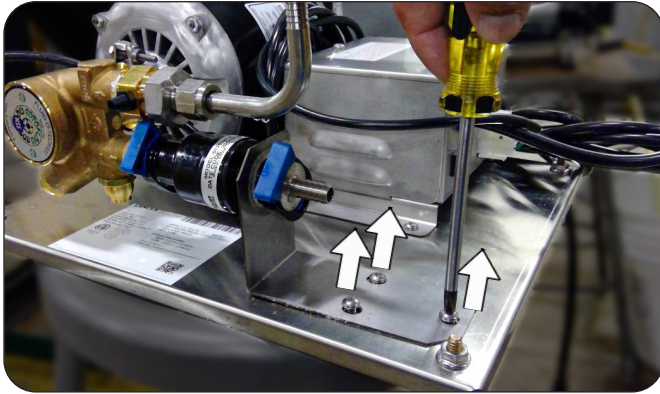


2. Manually rotate lock-bracket out of the way.

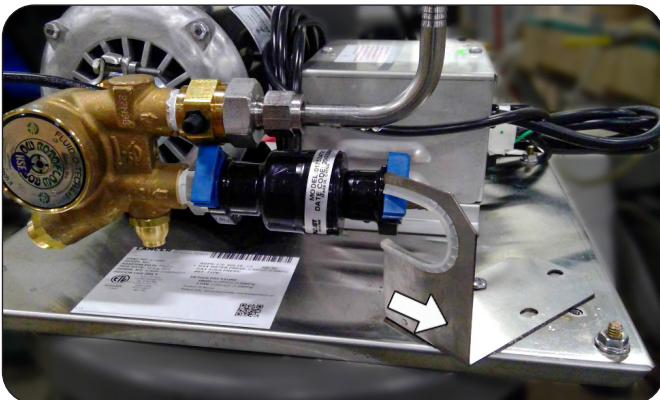


3. Rotate pump head counter-clockwise to access by-pass screw.



4. Visually identify the slotted-screw head for the by-pass adjustment.

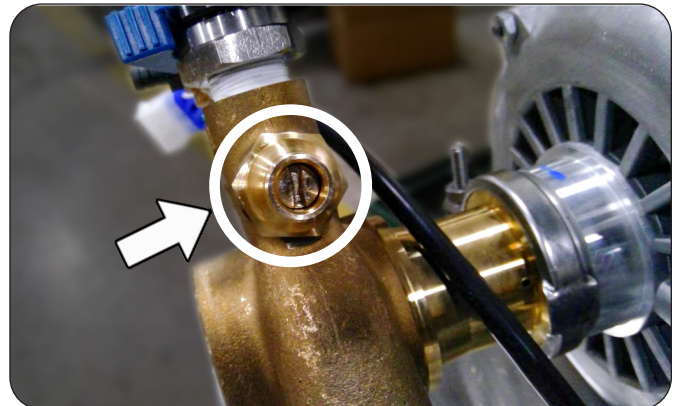

5. Use a slotted-screwdriver, rotate 1-1/2 turns counter-clockwise to reduce the by-pass pressure setting.

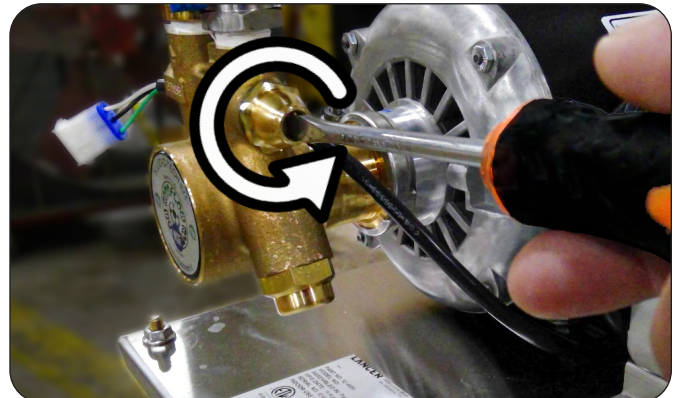

6. Once complete, rotate pump head clockwise back down to original position, rotate lock-bracket back over into place and tighten the 3 deck screws.